



  
MADE IN ITALY

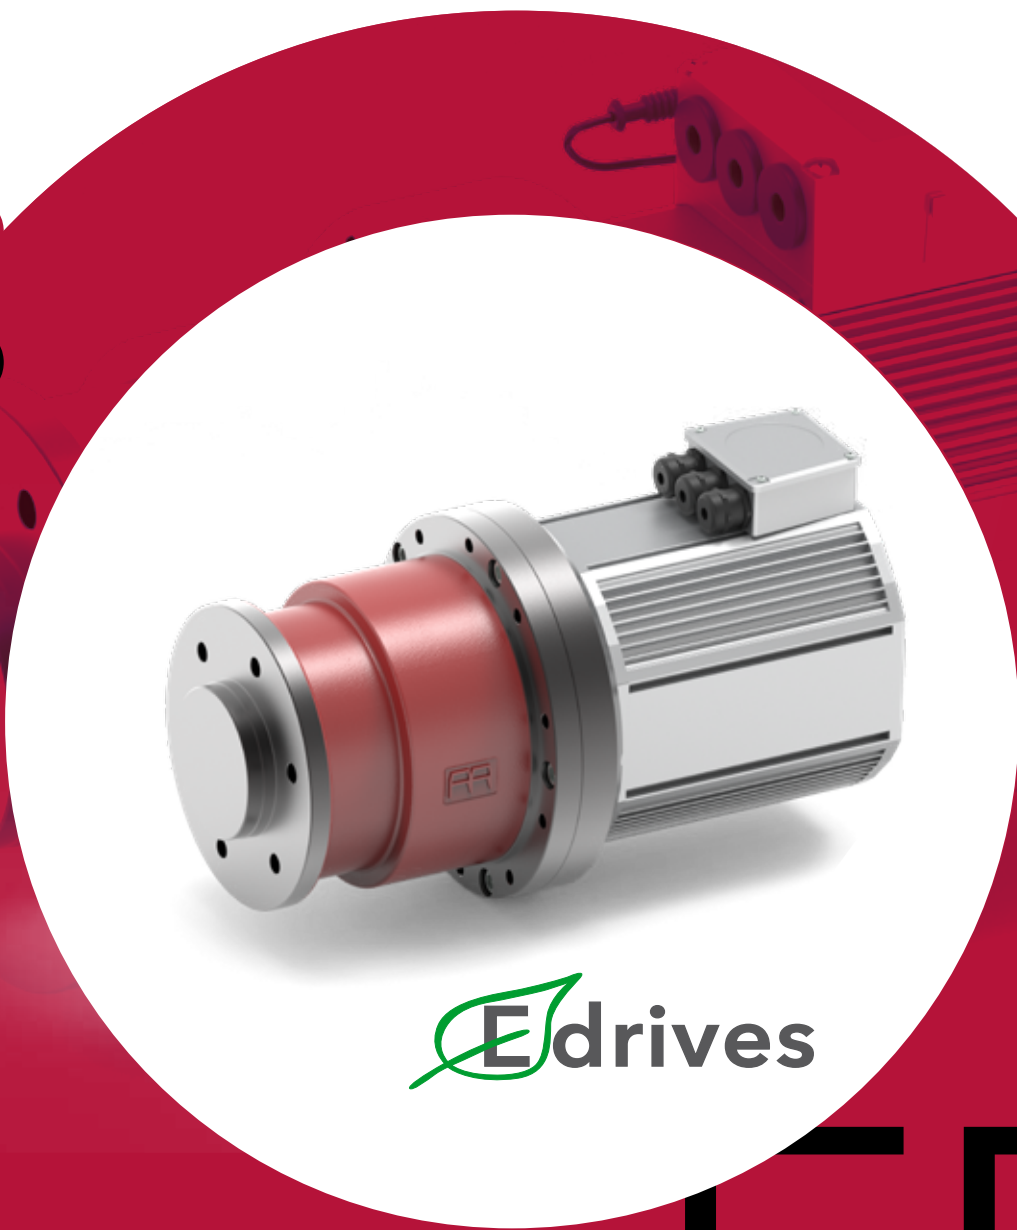

The logo for 'Edrives', featuring a green leaf-like symbol to the left of the word 'Edrives' in a bold, sans-serif font.

For 50 years we have been passionately dedicating ourselves to producing planetary gears and wheel gears made entirely in Italy. Reggiana Riduttori is a member of Interpump Group.

ELECTRIC TRACTION  
DRIVES

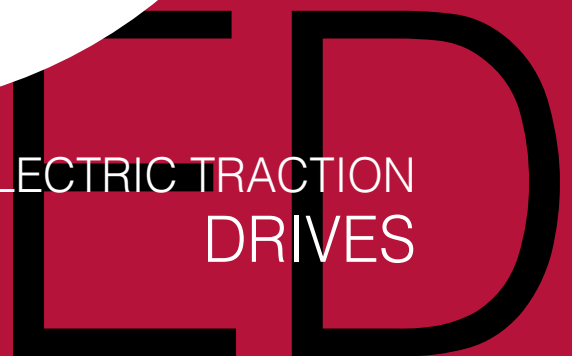

Pg  
3

D

## E DRIVES OUR SOLUTION FOR ELECTRIFICATION

With 50 years of Engineering experience, Reggiana Riduttori is one of the world's leading companies in the innovative design and manufacture of gearboxes for a wide variety of power transmission.

**E DRIVES series is the answer that Reggiana Riduttori is giving to a market seeking low emission as well as high efficiency products.**

Reggiana Riduttori offers a complete transmission range **with choices in electric motor input and torque output and a new range of wheel drives with electric motor.**

To ensure that the highest standards in engineering, quality and production are always met, our products are 100% manufactured in our headquarters in Italy. Designed to resist intense application cycles, our gear units go beyond expectations. A compact dimensions, high resistance to torque peaks and low noise are just a couple of the many features of our product ranges. All products in our range can be equipped with custom made accessories to ensure a perfect and simple assembly on your system.

*Con 50 anni di esperienza ingegneristica, Reggiana Riduttori è una delle aziende leader a livello internazionale nella progettazione e costruzione di riduttori e ruote motrici per un'ampia gamma di applicazioni.*

**La gamma E DRIVES è la risposta di Reggiana Riduttori ad un mercato che predilige sempre più la trazione elettrica per massimizzare l'efficienza, ridurre i costi e l'impatto sull'ambiente.**

*Reggiana Riduttori offre una selezione completa di sistemi di trasmissione compatibili con motore elettrico e una nuova linea di ruote motrici con motore elettrico: dimensioni compatte, forte resistenza ai picchi di coppia e bassa rumorosità sono solo alcune delle caratteristiche della nostra gamma.*

*I prodotti Reggiana Riduttori sono ambasciatori del Made in Italy nel mondo: interamente realizzati negli stabilimenti di San Polo d'Enza, offrono alla clientela qualità e affidabilità oltre alla customizzazione che garantisce un risultato finale perfetto per ogni impianto.*

# THINKING GREEN

# FOR THE FUTURE

## OPTIMIZED

COMPACT DESIGN

## LOW OPERATING NOISE

DUE TO OPTIMISED GEAR-MESH TECHNOLOGY

## HIGH PERFORMANCE

CAPABILITY AND EFFICIENCY

## MAINTENANCE FREE


EASY INSTALLATION WITH THE BEST AFTER SALES SERVICE

# C

## WHEEL DRIVE RANGE FOR ELECTRIC MOTORS


MODEL ----- technical data	RREDL70	RREDL200	RREDL400	Unit of measurement
<b>2 stages ratio</b>	20-25-31-42	19-24-32-39	19-24-32-39	i
<b>Efficiency 2 stages</b>	95	95	95	Re %
<b>3 stages ratio</b>	82-103-128-174	80-98-132-163	79-96-129-159	i
<b>Efficiency 3 stages</b>	93	93	93	Re %
<b>Rated output torque</b>	220	800	1600	T2 Nm
<b>Peak output torque</b>	700	2000	4000	T2 Max Nm
<b>Rated input speed</b>	3000	3000	3000	n1 rpm
<b>Max. input speed</b>	7000	7000	7000	n1 max rpm
<b>Max. axial forces</b>	2500	5000	9000	Famax
<b>Max. radial forces</b>	7000	21000	45000	Frmx
<b>Lubrication</b>	Lifetime	Lifetime	Lifetime	-
<b>Weight</b>	7	17	35	Kg
<b>Mounting position</b>	Horizontal	Horizontal	Horizontal	-
<b>Ambient temperature</b>	-20 to +50	-20 to +50	-20 to +50	°C
<b>Motor compatibility</b>	PMAC	PMAC	PMAC	-
<b>Voltage</b>	24/48/96	24/48/96	24/48/96	Vo
<b>Degree of protection</b>	up to IP67	up to IP67	up to IP67	-

- Light and compact design (high power density).
- High performance capability and efficiency.
- Low operating noise due to optimised gear-mesh technology.
- Easy installation, friendly customer support.
- Maintenance-free.

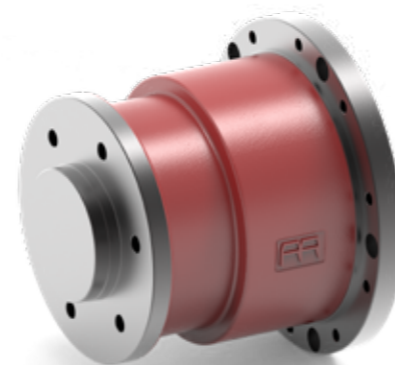

RR WHEEL DRIVE	ratio min/max	Max Power (Kw)
RREDL70	20-174	5
RREDL200	19-163	15
RREDL400	19-159	30


	Dc Bus Voltage		
	24	48	96
Amp			
RREDL70	125-370	62-230	31-115
RREDL200	n/a	102-250	51-117
RREDL400	n/a	230-500	110-300

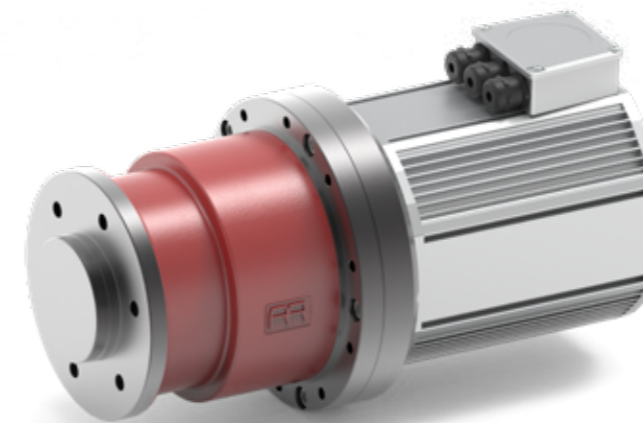

- Turnkey solution.
- Highest Made in Italy quality.
- Unified after-sales assistance.
- Customized solutions for all applications.


# D

## DIMENSIONS

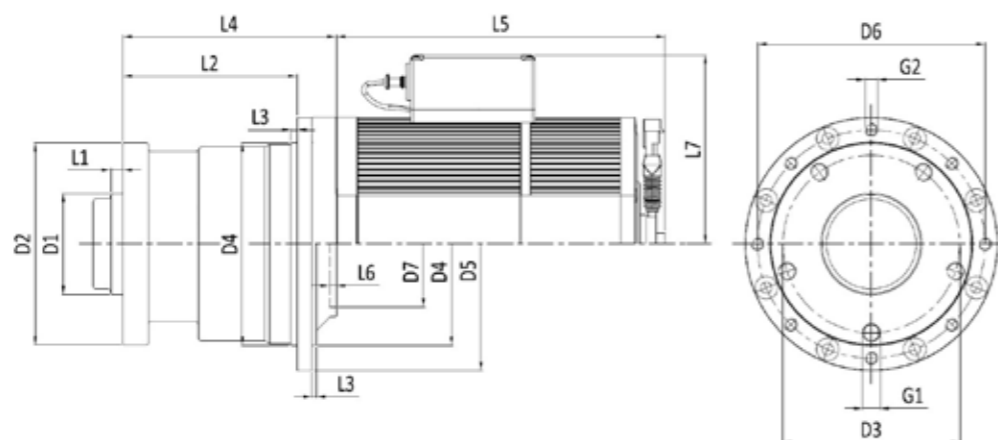

MODEL	D1 [mm]	D2 [mm]	D3 [mm]	D4 [mm]	D5 [mm]	D6 [mm]	D7 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	G1 [mm]	G2 [mm]
RREDL70	60	125	100	130	170	150	75	10	105	5,5	130	up 170	5,5	80	M12x1,5 (4x)	M10 (6x)
RREDL200	80	159	140	160	200	180	100	10	138	5,5	169	up 200	5,5	155	M14x1,5 (5x)	M10 (8x)
RREDL400	110	215	160	220	270	240	140	10	180	5,5	225	up 200	5,5	155	M16x1,5 (6x)	M12 (10x)

## INSTALLATION SYSTEM

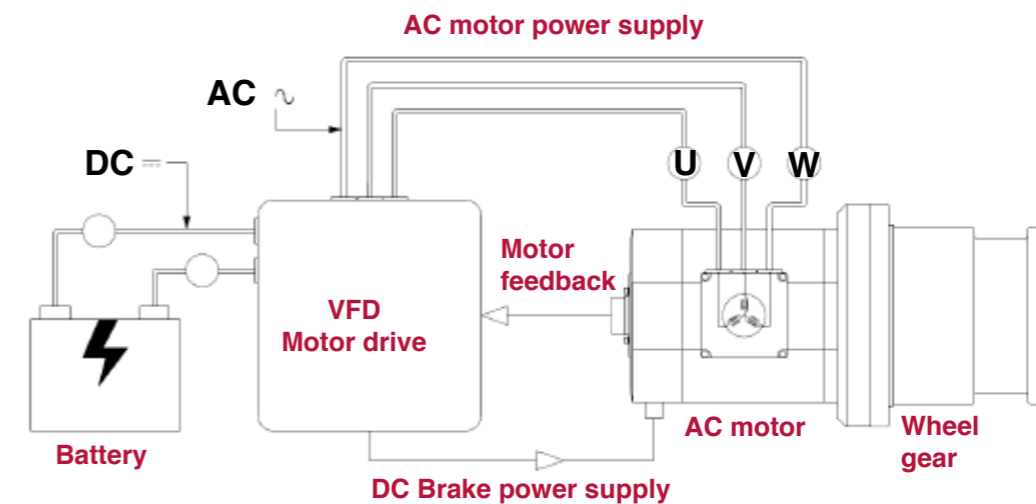



MOTOR FEATURES



Pg  
6



Pg  
7



TORQUE/SPEED CHARTS

Motor for RREDL70	VOLTAGE	RATED CURRENT	RATED TORQUE	RATED SPEED	RATED POWER	TORQUE PEAK	A (Max)	RPM MAX	MAX POWER	BRAKING TORQUE
SIZE	V dc-bus	Arms	Nm	rpm	kW	Nm	Arms	rpm	kW	Nm
A/24	24	125	7,5	3500	2,75	19	317	4100	6,96	
B/24	24	200	12,1	3500	4,43	29,5	488	4100	10,81	
C/24	24	280	17,8	3500	6,52	43,5	684	4100	15,94	
D/24	24	370	23	3500	8,43	59	949	4100	21,62	
E/24	24	370	30	2500	7,85	65	802	3000	17,02	
A/48	48	62	7,5	3500	2,75	19	157	4100	6,96	
B/48	48	100	12,1	3500	4,43	29,5	244	4100	10,81	
C/48	48	140	17,8	3500	6,52	43,5	342	4100	15,94	
D/48	48	190	23	3500	8,43	59	487	4100	21,62	
E/48	48	230	28	3500	10,26	78	641	3500	28,59	
A/96	96	31	7,5	3500	2,75	19	79	4100	6,96	
B/96	96	50	12,1	3500	4,43	29,5	122	4100	10,81	
C/96	96	70	17,8	3500	6,52	43,5	171	4100	15,94	
D/96	96	95	23	3500	8,43	59	244	4100	21,62	
E/96	96	115	28	3500	10,26	78	320	4000	28,59	

\*custom sizes available on request


Motor for RREDL200/400	VOLTAGE	RATED CURRENT	RATED TORQUE	RATED SPEED	RATED POWER	TORQUE PEAK	A (Max)	RPM MAX	MAX POWER	BRAKING TORQUE
SIZE	V dc-bus	Arms	Nm	rpm	kW	Nm	Arms	rpm	kW	Nm
036/48	48	102	18	3000	5,7	45	200	6000	14	
048/48	48	140	24	3000	7,5	60	280	6000	19	
072/48	48	188	32	3000	10,0	80	376	6000	25	
096/48	48	235	40	2700	11,3	100	470	4500	28	
120/48	48	282	48	2500	12,6	120	564	3700	31	
144/48	48	329	58	2200	13,4	145	658	3000	33	
036/96	96	51	18	3000	5,7	45	100	6000	14	
048/96	96	70	24	3000	7,5	60	140	6000	19	
072/96	96	94	32	3000	10,0	80	188	6000	25	
096/96	96	117	40	2700	11,3	100	235	4500	28	
120/96	96	141	48	2000	12,6	120	282	3700	31	
144/96	96	164	56	2000	13,4	145	329	3000	33	

\*custom sizes available on request

- Extremely low inertia momentum, ideal for quick high speed ramp-up.
- High efficiency, 95%.
- All voltage available, customizable upon order.
- Power connection via direct cable exit or Amphenol connector.
- Sensor connection and Thermal via AMP Superseal plug.
- Speed & position sensors included.
- Temperature sensor.
- Motors are IP65 as minimum and up to 6K9K.
- Motor suitable to de-flux.
- Constant torque at variable speed.
- High power density, tooth winding technology.
- Brake available upon request.


Motor for RREDL70

Torque Nm

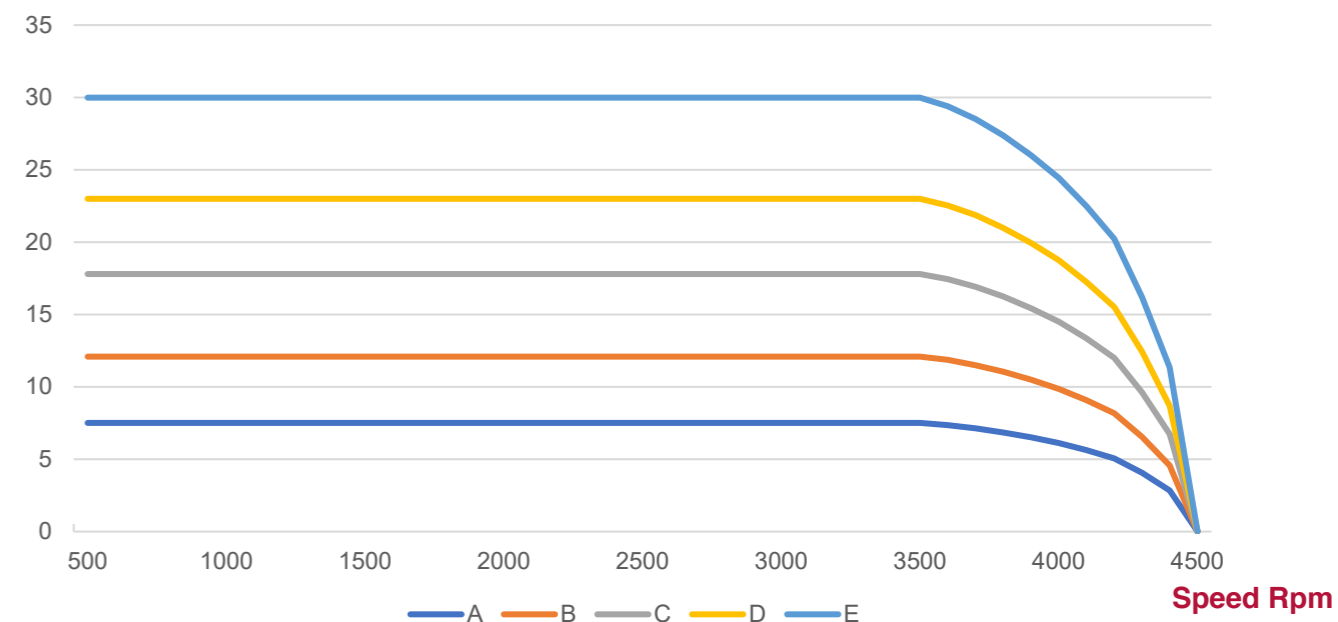

Motor for RREDL200/400

Torque Nm

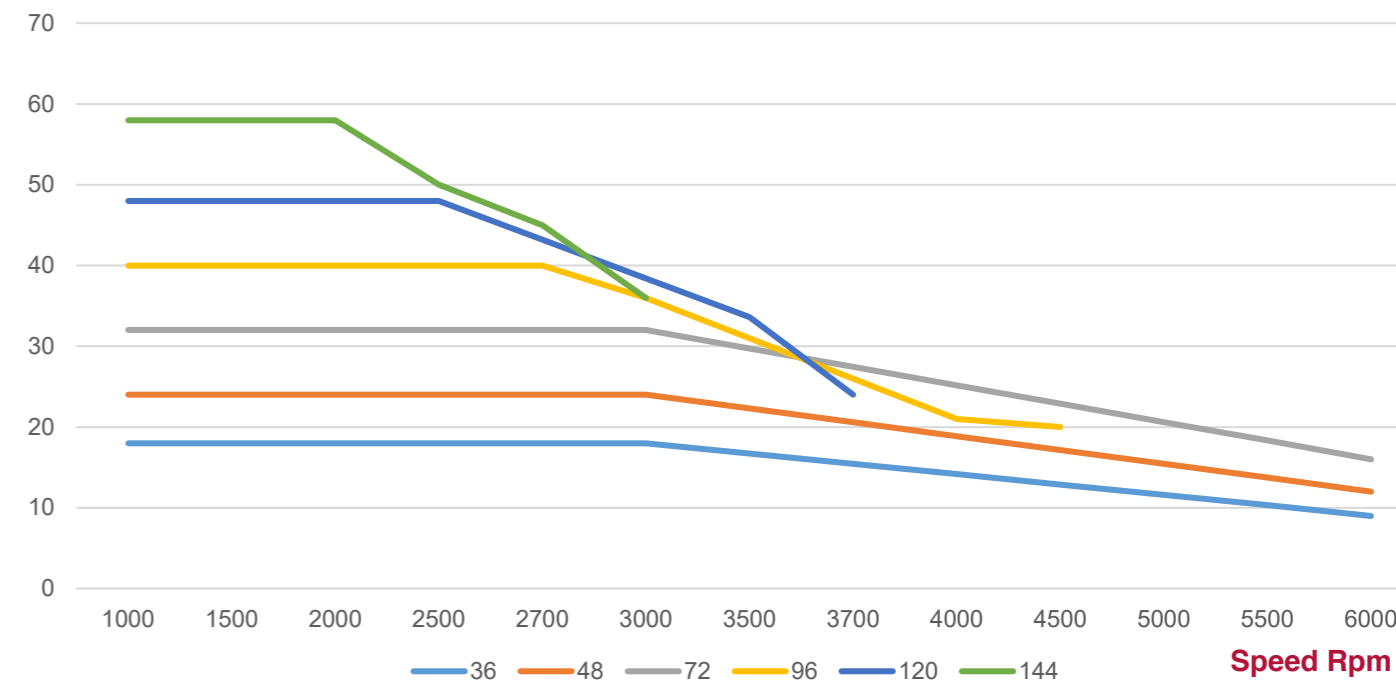

# A



## APPLICATIONS





Pg  
8





Pg  
9

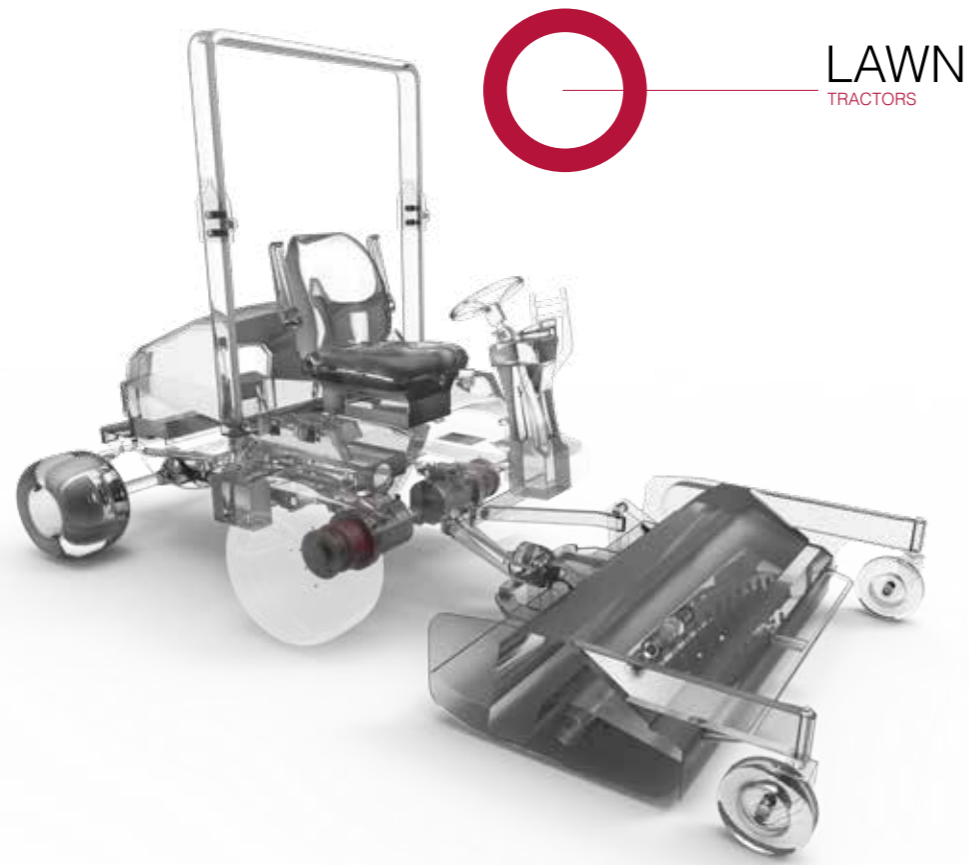

LAWN  
TRACTORS

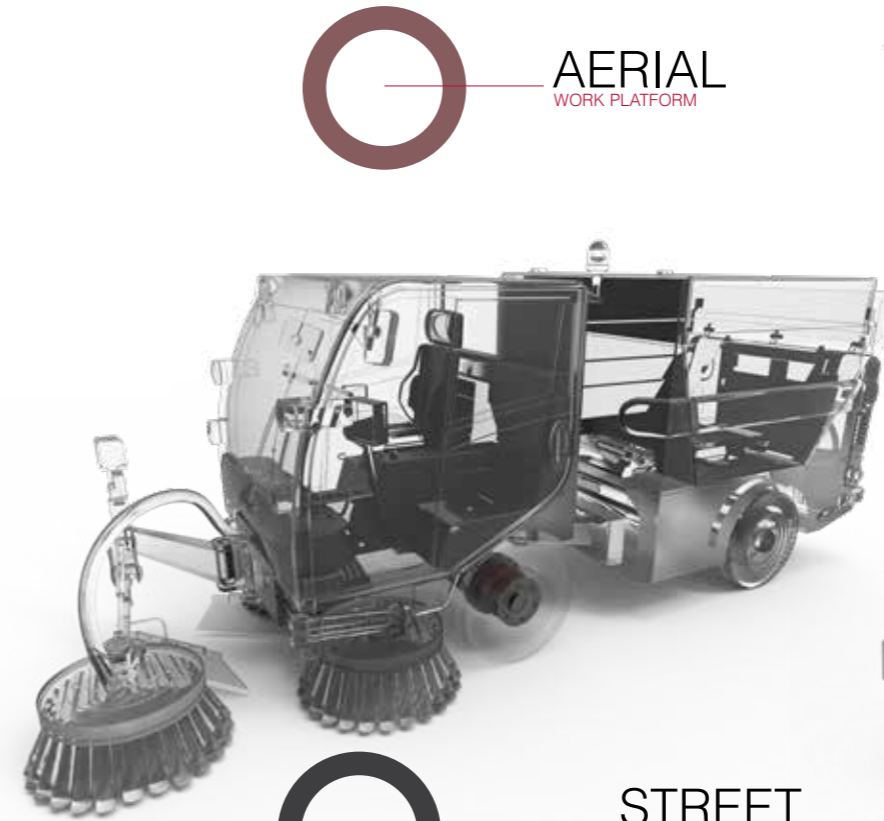


AERIAL  
WORK PLATFORM

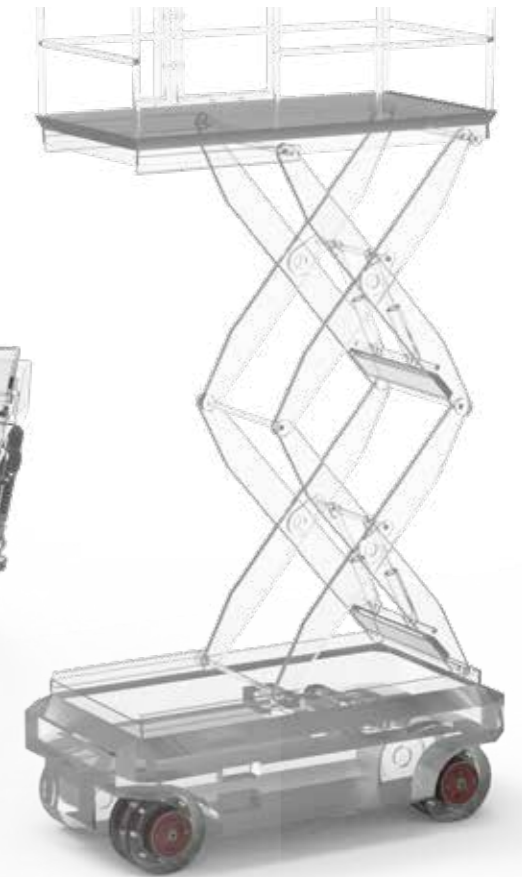

STREET  
SWEEPER



OTHER APPLICATIONS



GOLF CADDY  
CARS



BEACH  
CLEANING MACHINES




FORKLIFTS



REPLACEMENT  
FOR HYDRAULICS DRIVES



LIGHT  
CONSTRUCTION EQUIPMENTS




GROUND  
SUPPORT EQUIPMENTS



# G

## Global Sales Network

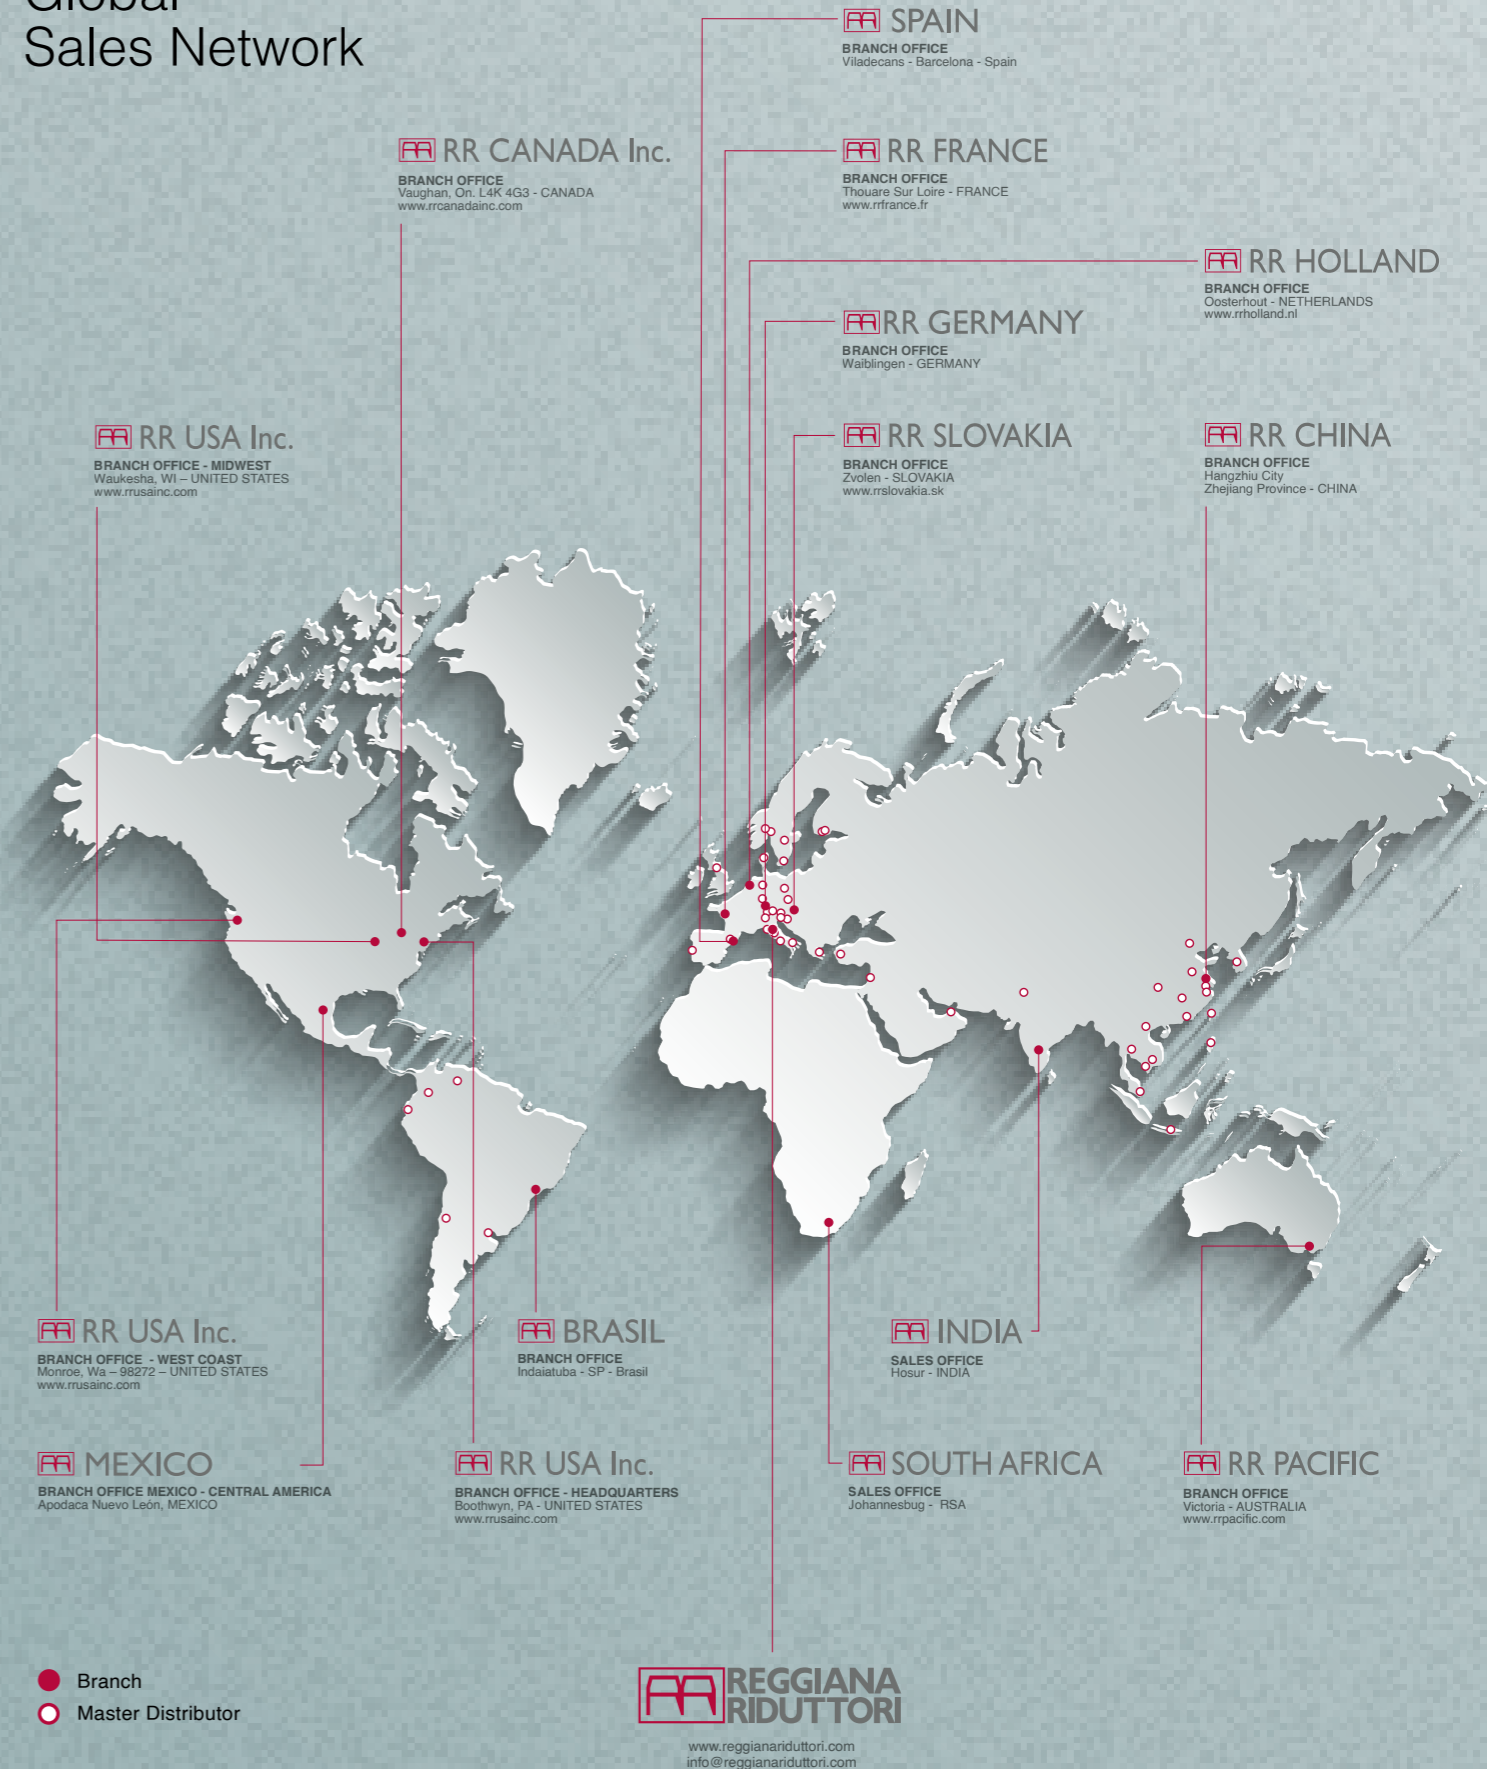



**Headquarter**

Via Martiri di Marzabotto 7  
42020 S.Polo D'Enza (RE)  
Reggio Emilia, Italy  
REGGIANARIDUTTORI.COM

Ph. +39 0522 259111  
Fax +39 0522 874321  
info@reggianariduttori.com  
PEC: reggianariduttori@legalmail.it

